


We make a material difference

PaperTyger® 94gsm / 25 # is a lightweight tear resistant laminated paper manufactured by our patented process to produce an alternative to synthetic paper and other durable media products. This product is made with FSC certified papers. Our product offers comparable durability while providing significant advantages in terms of printing and converting. Typical applications include maps.

Property	Imperial	Metric	Test Method
Basis Weight	25 #	94gsm	T-410
Yield	7363 in² / lb	0.0106 sm/g	Calculated
Caliper	3.65	93 µm	T-411
Tensile (MD)	31 lbf/in	5.3 kn/m	T-494
Tensile (CD)	36 lbf/in	6.2 kn/m	T-494
Elmendorf Tear (MD)	0.18 lbf	80 gf	T-414
Elmendorf Tear (CD)	0.19 lbf	86 gf	T-414
Brightness	84% +/- 1.5	84% +/- 1.5	T-452
Smoothness	80 Sheffield Units	80 Sheffield Units	T-538
Opacity	92.5%	92.5%	T-425

Writing & Printing Basis	17x22 - 500 sheets per ream (1298.6 ft²)	
Master Roll Widths	52"	
Core	3", 5" or 6" paper	

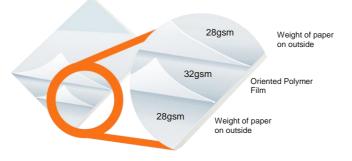





The information contained here is provided for product selection purposes only and is not to be considered specification or performance data. Under no circumstances will the seller be liable for any loss, damage, expense or incidental or consequential damage of any kind arising in connection with the use or inability to use its product. Specific conditions of sale and Chase/s limited warranty are set out in detail in Chase Corporate Terms and Conditions of Sale. Those Terms and Conditions are the only source that contains Chase's limited warranty and other terms and conditions.

PRODUCT

DATA SHEET

Reference No. F4927

PaperTyger® 94gsm

25 # **Durable Paper**



295 University Avenue Westwood, MA 02090, USA

T: 781-332-0700 F: 781-332-0701 www.chasecorp.com

European Headquarters

Guildford Place, 124a Guildford Street, Chertsey, Surrey, KT16 9AH, UK

T: 01932 561144 F: 01932 561177 www.papertyger.us.com

