


PaperTyger[®] 140gsm / 37 # is lightweight a tear resistant black laminated paper manufactured by our patented process to produce an alternative to synthetic paper and other durable media products. This product is made with FSC certified papers. Our product offers comparable durability while providing significant advantages in terms of printing and converting. Typical applications include packaging, books, brochures and photo albums.

Property	Imperial	Metric	Test Method
Basis Weight	37 #	140 gsm	T-410
Yield	5054 in ² / lb	0.00714 sm/g	Calculated
Caliper	6.5 mils	165 µm	T-411
Tensile (MD)	78 lbf/in	13.55 kn/m	T-494
Tensile (CD)	78 lbf/in	13.55 kn/m	T-494
Elmendorf Tear (MD)	0.39 lbf	177 gf	T-414
Elmendorf Tear (CD)	0.38 lbf	174 gf	T-414
Smoothness	330 Sheffield Units	330 Sheffield Units	T-538
Opacity	100%	100%	T-425

Writing & Printing Basis	17x22 – 500 sheets per ream (1298.6 ft ²)
Master Roll Widths	48" or 53.5"
Core	3", 5" or 6" paper

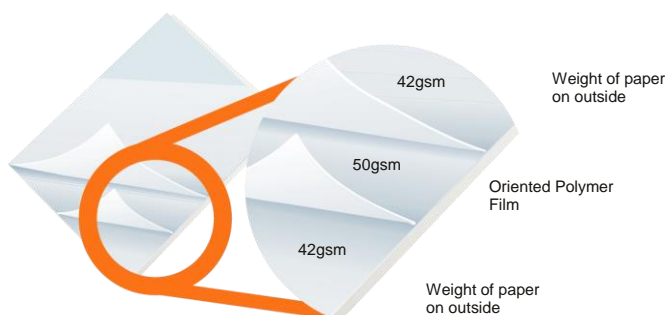

The information contained here is provided for product selection purposes only and is not to be considered specification or performance data. Under no circumstances will the seller be liable for any loss, damage, expense or incidental or consequential damage of any kind arising in connection with the use or inability to use its product. Specific conditions of sale and Chase's limited warranty are set out in detail in Chase Corporate Terms and Conditions of Sale. Those Terms and Conditions are the only source that contain Chase's limited warranty and other terms and conditions.

PRODUCT DATA SHEET

Reference No.

F4740

**PaperTyger[®]
140gsm**

37 #

Black

Durable Paper



ISO 9001
2008 REGISTERED



USA Headquarters

295 University Avenue
Westwood, MA 02090, USA

T: 781-332-0700

F: 781-332-0701

www.chasecorp.com

European Headquarters

Guildford Place,
124a Guildford Street,
Chertsey, Surrey,
KT16 9AH, UK

T: 01932 561144

F: 01932 561177

www.papertyger.us.com

